




TENT & TRAIL

Adventure Series Roof Tent Installation & User Guide

Make sure to read this document fully before attempting to install or use your roof tent.

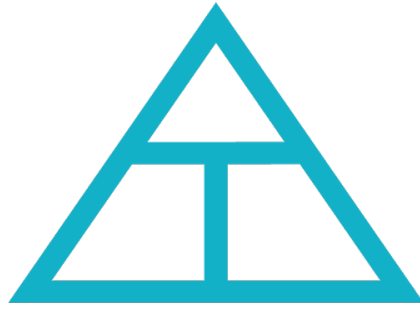

WARNING

Improper installation or use of your roof tent may result in serious injury or death. Follow these installation instructions carefully to ensure proper installation on your vehicle and safe use of your tent. Please check with your vehicle manufacturer for specified loading capacity of your roof rack or roof bars.

- Please apply a small amount of grease to threads of bolts for easy of use and durability.
- Please make sure all securing nuts are tightened properly before driving the car.
- Please make sure the roof tent is closed and secured properly before driving the car.
- Please make sure your max. speed does not exceed 70mph with the roof tent fitted to vehicle.
- Please make sure to air and dry out roof tent within 72hrs if packed away wet.
- Please make sure the roof tent including the fabrics, mattress etc. are dried completely before leaving the tent closed for any long periods of time.

1. Carefully unbox your roof tent. Lay the roof tent down, cut straps and lift off the cardboard box top. Remove any other packaging and lift the roof tent out of the bottom half of the cardboard box. Be careful **NOT TO CUT THE ROOF TENT!**



2. With the roof tent on its base, unclasp the two clips and then partially open the tent to remove the tent parts.

If you are not installing cargo bars, go to **Step 5**. To install the cargo bars, insert 2 x M8 nuts into the top channel on the side of the roof tent.

Place a cargo rail foot in position with the 2 nuts behind and secure in place with 2 M8 Allen cap bolts, **do not over tighten**. Repeat on the opposite side so the feet are aligned opposite each other.



4. Insert 2 x M8 20mm bolts into the channel on the underside of the cargo bar, one each end to align with bar feet. Place the cargo bar onto the feet and secure bar with penny washer and M8 nylon nut.

Repeat this process with the other cargo bar and tighten all M8 nylon nuts with 13mm spanner until secure, **do not over tighten**.

5. Place roof tent onto your vehicle's roof bars or roof rack, the mounting rail should be perpendicular to the bars they will mount to. Position the hinge at the front of the vehicle.



6. Assemble the aluminium sliding plates and M8 50mm bolts. Insert sliding plates into mounting rail underneath the roof tent, either side of the roof bars at the 4 mounting locations.

7. Place steel mounting plate up against the roof bar and thread on a M8 washer and nut onto protruding 50mm bolts. Tighten all eight bolts securely with the provided 13mm spanner.

Check all the mounting bolts and brackets periodically during the use of your roof tent to ensure they are securely fastened to your rack system.



8. Check the roof tent is positioned correctly and all eight bolts are tightened securely, insert plastic end caps into the ends of the mounting rail.

Adventure Series Roof Tent

Setup Guide

1. Secure ladder into position via the two hooks on the sides and of the tent. Release the holding Velcro strap and extend ladder from the bottom, until the locking pins in each section engage to required height.
2. Unlock and release the two external clasps and lift handle. As you open the tent, the gas struts will take over and automatically open the roof tent.
3. Unzip the bug net and the internal canvas door to gain access to the inside of the tent. Pull the internal frame up and fold out into position. Lock into place with the 2 adjustable poles on each side of the internal roof.
4. Find long slim bag containing the two rain fly awning poles. Remove them of the bag and insert into the holes at each side, on the base of the roof tent. **Make sure to slot the poles fully into the holes to provide good tension on the rain fly.**
5. Add the optional awning extension by zipping the awning extension into the front entrance awning. Position the two adjustable poles to desired height and angle of awning. Using the two longer guy ropes, secure onto the protruding tips of the poles and peg into the ground. Use the two shorter guy ropes to secure the side of awning extension and peg into ground. **Make sure all ropes are tight and secure via the tensioner. Remove awning extension in very windy conditions to avoid damage.**
6. Happy camping!

If you have any questions or queries about any of the steps in this guide feel free to contact us at:
support@tentandtrail.com or 01264 604 972.